


LN75-R26Q



LN75-R26QS

LN75-R26QT

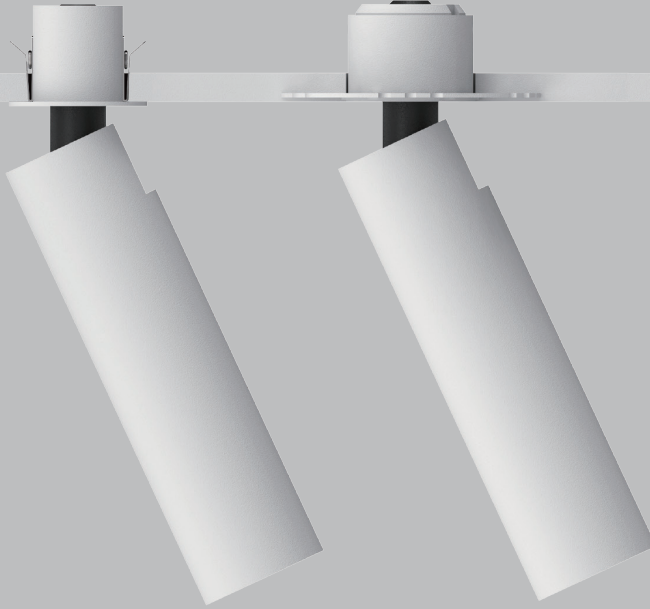

With Trim

Trimless



White




Black




Gold



LN75-R26QS



LN75-R26QT



Basic Information

Model	LN75-R26QS/T
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White
Reflector Color	White/Black/Gold
Material	Pure aluminum
Cutout Size	∅ 25mm / ∅ 29mm
Light Direction	90° 360°
IP Rating	IP20
Power	Max.8W
Input Voltage	DC36V
Input Current	Max. 200mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra/90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35°
UGR	< 9
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

MINI Family